

RoHS Compliant


Rev	Modification	Date
A1	Issue	12/25/2021



Farsince USB4 cable enables the connection of various devices, such as smart phones, monitors, external enclosures and docking stations, via a USB Type-C or Thunderbolt 3 port of a PC or laptop. The cable supports data and video on a single cable, supports the transfer of USB as well as DisplayPort and PCI Express data




**Key Features**

- Data transfer rate: 40Gbps
- Display resolution up to: 7680\*4320@60Hz
- Supports HDR10, HDCP 1.4 and 2
- Supports PCI Express 3.0 protocol
- Supports DisplayPort 1.4a protocol
- Supports DisplayPort Alt Mode 2.0
- Dual channel, bi-directional data transfer
- USB Power Delivery (USB PD 3.0) support up to 100 watt (20 V / 5 A)
- Backward compatible to USB 3.2, USB 2.0 and Thunderbolt 3
- Braided cable, twist cable construction

Projection: 	Tolerance: XX= XXX=	Product: USB4 M/M Cable
Scale: None	DWG No.: FS16703B	Part No.: FS16703B
Unit: MM	Page: 1/3	<b>FARSINCE</b> Call: +86-18957871301 Email: sales@farsince.com www.farsince.com for more information ©Ningbo Farsince Electronic Co., Limited All Rights Reserved
Customer:		
Customer Approve:		
Draw:	Kelly Xu	
Approve:	David Han	

RoHS Compliant

Rev	Modification	Date
A1	Issue	12/25/2021

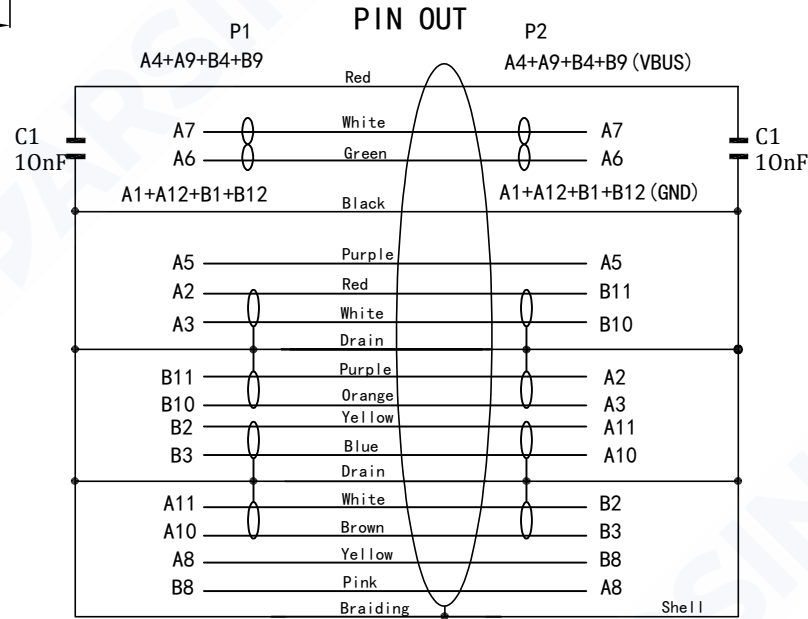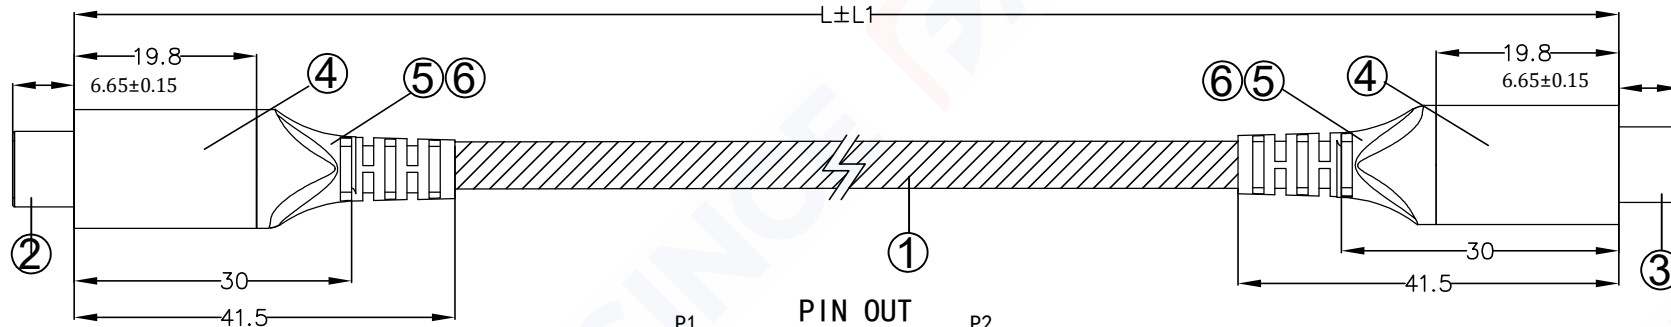

**Electronic Tests:**

- Open/Short/Intermittence: 100%
- Rate Voltage: DC 300V
- Insulation Resistance: 5MΩ Min
- Conductive Resistance: 5Ω Max
- Power Delivery: 20V 5A 100W
- Data transfer: Read/ Write no lower than 1700M/S

Model #:	Length
FS16703B-003	0.3M
FS16703B-005	0.5M
FS16703B-008	0.8M
FS16703B-010	1.0M
FS16703B-012	1.2M

⑥	Shell	Aluminum alloy, Black color	2	pcs			
⑤	Outer Mold	45P PVC, Black	12	g	Projection:	Tolerance: XX=XXX=	Product: USB4 M/M Cable
④	Inner Mold	LDPE	5	g	Scale: None	DWG No.: FS16703B	Part No.: FS16703B
③	Connector	USB 3.1 Male with Shield Can, Pin Gold Flash, Shell nickel plated+IC: CPS8821	1	pcs	Unit: MM	Page: 2/3	
②	Connector	USB 3.1 Male with Shield Can, Pin Gold Flash, Shell nickel plated	1	pcs	Customer:		
①	Cable	[32AWG*1P+D+AM+HM]*4C+32AWG*1P+32AWG*4C+24AWG*2C+D(7/0.20BC)+AM+B (16/5*0.08TC) PVC Jacket with cotton braiding OD=4.5MM	L	mm	Customer Approve:		
No.	P/No.	Specifications	Q'TY	Unit	Draw:	Kelly Xu	
					Approve:	David Han	

**FARSINCE**

Call:+86-18957871301 Email: sales@farsince.com  
www.farsince.com for more information  
©Ningbo Farsince Electronic Co., Limited  
All Rights Reserved